

CITYLOCK 4X16 10CM


PRODUCT NUMBER # 322



- Smooth surfaces and finely chamfered edges combine to create a sleek and contemporary look
- Linear shape easily forms stacked, runner, and a variety of herringbone patterns
- Suitable for medium vehicular applications, such as residential streets and commercial parking lots, with proper pavement design and installation
- Crenellated sidewalls interlock for herringbone-equivalent creep resistance to enable innovative installation patterns in vehicular applications
- Made of durable concrete that won't decay, distort, or attract pests. Iron oxide pigments won't fade with extended UV exposure. Meets or exceeds applicable requirements of ASTM C936 and C1782


The CityLock series of standard and permeable pavers includes a range of shapes to suit a variety of traffic conditions and base preparations. CityLock units share a common joint design that eliminates bond line creep to enable installation patterns previously avoided in vehicular applications. The fine chamfers create a contemporary aesthetic and deliver a smooth rolling surface, making CityLock ideal for mixed vehicular and pedestrian applications such as parking lots and local roads.

STONE(S)



			4x16
Height	<i>in</i>	In.	4
	<i>mm</i>	MM.	101.6
Length	<i>in</i>	IN.	16
	<i>mm</i>	MM	406.4
Width	<i>in</i>	IN	4
	<i>mm</i>	MM	101.6
Units	<i>/pl</i>	QTY	168

PALLET LAYOUT

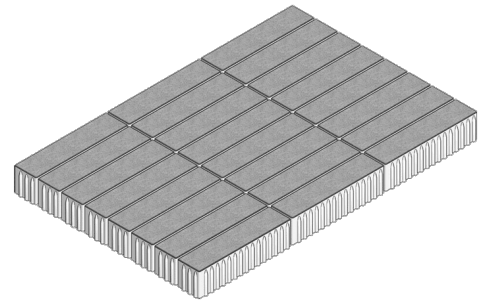

NOTES

Weights are approximate and do not include shipping pallet. Installation to applicable ICPI standards is required for warranty coverage. Made with natural materials, which vary in color, and Portland cement, which may effloresce - any implied warranty to the contrary is disclaimed.

PALLET SPECS

Pallet Weight	3584 lbs
Sq Ft/Pallet	75 sq. ft.



Distributed by:



www.aspent.com (800) 869-9600

www.pavestone.com

CITYLOCK 4X12 10CM

PRODUCT NUMBER # 323



- Smooth surfaces and finely chamfered edges combine to create a sleek and contemporary look
- Linear shape easily forms stacked, runner, and a variety of herringbone patterns
- Suitable for heavy vehicular applications, such as municipal streets and minor arterials, with proper pavement design and installation
- Crenellated sidewalls interlock for herringbone-equivalent creep resistance to enable innovative installation patterns in vehicular applications
- Made of durable concrete that won't decay, distort, or attract pests. Iron oxide pigments won't fade with extended UV exposure. Meets or exceeds applicable requirements of ASTM C936 and C1782


The CityLock series of standard and permeable pavers includes a range of shapes to suit a variety of traffic conditions and base preparations. CityLock units share a common joint design that eliminates bond line creep to enable installation patterns previously avoided in vehicular applications. The fine chamfers create a contemporary aesthetic and deliver a smooth rolling surface, making CityLock ideal for mixed vehicular and pedestrian applications such as parking lots and local roads.

STONE(S)



		4x12	
Height	<i>in</i>	In.	4
	<i>mm</i>	MM.	101.6
Length	<i>in</i>	IN.	12
	<i>mm</i>	MM	304.8
Width	<i>in</i>	IN	4
	<i>mm</i>	MM	101.6
Units	<i>/pl</i>	QTY	224

PALLET LAYOUT

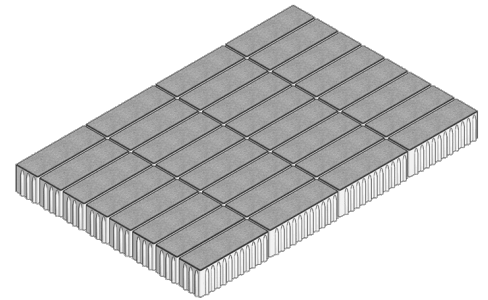

NOTES

Weights are approximate and do not include shipping pallet. Installation to applicable ICPI standards is required for warranty coverage. Made with natural materials, which vary in color, and Portland cement, which may effloresce - any implied warranty to the contrary is disclaimed.

PALLET SPECS

Pallet Weight	3584 lbs
Sq Ft/Pallet	75 sq. ft.



Distributed by:

www.aspent.com (800) 869-9600

www.pavestone.com