



Part # GISB-12-12-12

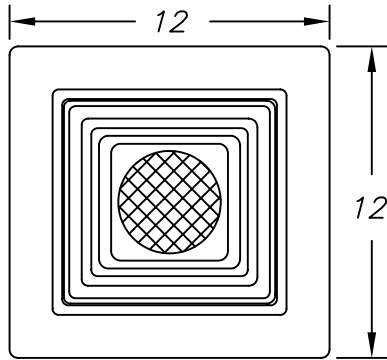


TOP VIEW


FLOW SCHEMATIC

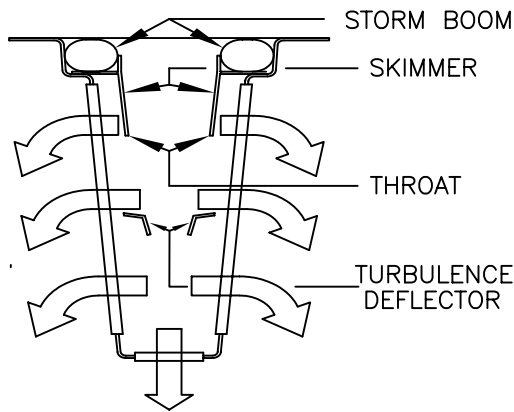

SIDE VIEW

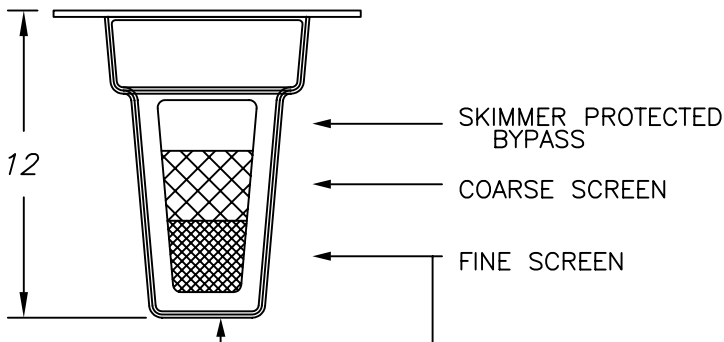

Flow Specifications				
Description of filter opening	Percent Open Based on Screen Dimensions	Total Square Inches per Unit	Square Inches of Total Unobstructed Openings	Flow Rate (Cubic Feet per Second)
Skimmer protected By-Pass	100%	28.0	28.0	1.0 cfs
Coarse Screen 3/4" x 1-3/4" stainless steel flattened expanded	62%	28.0	17.3	.8 cfs
Medium Screen 10x10 mesh stainless steel	56%	28.0	15.8	.7 cfs
Fine screen 14 x 18 mesh stainless steel	68%	16.0	10.8	.6 cfs
THROAT FLOW RATE Total: 0.5cfs		TREATED FLOW RATE Total: 2.1 cfs		
FLOW RATES BASED ON UNOBSTRUCTED OPENINGS				

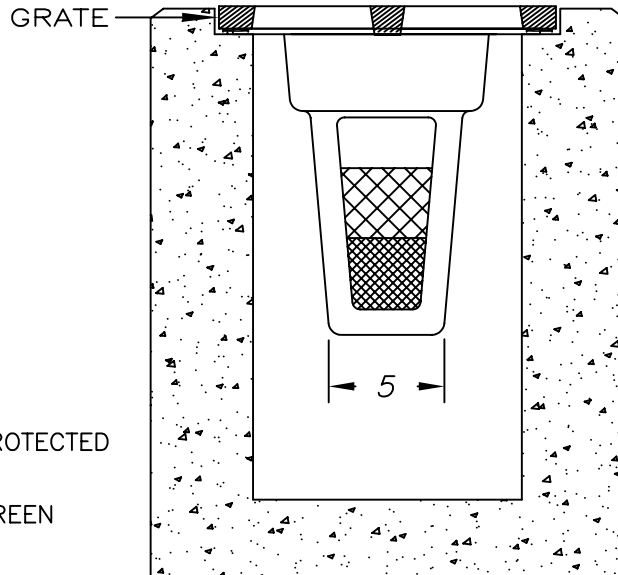

CONCRETE STRUCTURE

REMOVE GRATE
INSERT GISB
REINSTALL GRATE

BOX MANUFACTURED FROM MARINE GRADE FIBERGLASS & GEL COATED FOR UV PROTECTION

5 YEAR MANUFACTURERS WARRANTY

PATENTED

ALL FILTER SCREENS ARE STAINLESS STEEL

EXCLUSIVE CALIFORNIA DISTRIBUTOR:
BIO CLEAN ENVIRONMENTAL SERVICE
P.O. BOX 869, OCEANSIDE, CA. 92049
TEL: 760-433-7640 FAX: 760-433-3176
Email: info@biocleanenvironmental.net

SUNTREE QUALITY PRODUCTS ARE BUILT FOR EASY CLEANING AND ARE DESIGNED TO BE PERMANENT INFRASTRUCTURE AND SHOULD LAST FOR DECADES.

NOTE: DETAIL DRAWINGS ARE 2 TO 1

SUNTREE TECHNOLOGIES 798 CLEARLAKE RD. SUITE #2 COCOA FL. 32922 TEL. 321-637-7552 FAX 321-637-7554		PROJECT:	
GRATE INLET SKIMMER BOX GISB-12-12-12		REVISIONS:	DATE:
DATE: 04/12/04	SCALE: SF = 15	REVISIONS:	DATE:
DRAFTER: N.R.B.	UNITS = INCHES	REVISIONS:	DATE: