

Are You Compliant?

Outpak Concrete Washout® unit is designed to be a portable solution for harmful industrial concrete sediment, paint, dry wall mud, stucco, and mortar. With Outpak Concrete Washouts your job site will be organized, eco-friendly, and BMP compliant to avoid costly fines. They are designed for a simple and quick set-up in minutes and can remain for the duration of the project. Outpak Concrete Washout is compatible for both mixer, pump trucks and wheel barrows. Dispose of after evaporation and job completion.



Easy Setup



Corrugate Washout

Outpak Corrugate Washout is a Universal, "portable" washout. Good for mixer truck, and wheel barrow washout containment. Dispose of after job completion.

Pump Truck Washout



6x6 Outpak Washout holds up to 1.3 cubic yards of concrete and waste water.

945-123030	30" x 30" x 14"h Corrugate Washout	0.25 cu yds	3 Washouts	6 lbs.	\$34
945-123404	4' x 4' x 14"h Corrugate Washout	0.68 cu yds	10 Washouts	10 lbs.	\$65
945-123406	6' x 6' x 12"h Corrugate Pump Washout	1.33 cu yds	15 Washouts	16 lbs.	\$78

Long-lasting PVC Washout



PVC Washout

PVC Washouts are designed for larger volume of containment for pump trucks and mixer trucks.

The high UV resistance of the PVC Washout, allows for longer job life and higher tolerance to weather conditions.

965-001430	6' x 8' PVC Washout	2 cu yds.	30 Washouts	38lbs.	\$325
965-001440	8' x 10' PVC Washout	3 cu yds.	45 Washouts	50lbs.	\$425



The Midwest's **Most Trusted** Site Solutions Provider




The Outpak washout is the simplest washout on the market.



This medium washout can hold up to 10 washouts.

The Logo Corner:
Here are just a few of the Manufacturers we know and trust:

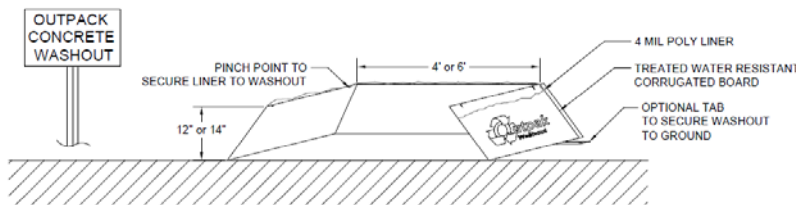

NOTES:

1. THE CONCRETE WASHOUT AREA SHALL BE INSTALLED PRIOR TO ANY CONCRETE PLACEMENT ON THIS PROJECT.
2. SIGNS SHALL BE PLACED AS NECESSARY TO CLEARLY INDICATE THE LOCATION OF THE CONCRETE WASHOUT.
3. THE CONCRETE WASHOUT AREA WILL BE REPLACED AS NECESSARY TO MAINTAIN CAPACITY FOR WASTE CONCRETE AND OTHER LIQUID WASTE.
4. WASHOUT RESIDUE SHALL BE REMOVED FROM THE SITE AND DISPOSED OF AT AN APPROVED WASTE SITE.
5. DO NOT MIX EXCESS AMOUNTS OF FRESH CONCRETE OR CEMENT ON-SITE.
6. DO NOT WASH OUT CONCRETE TRUCKS INTO STORM DRAINS, OPEN DITCHES, STREETS, OR STREAMS.
7. AVOID DUMPING EXCESS CONCRETE IN NON-DESIGNATED DUMPING AREAS.
8. LOCATE WASHOUT AREA AT LEAST 50' (15 METERS) FROM STORM DRAINS, OPEN DITCHES, OR WATERBODIES.
9. WASH OUT WASTES INTO THE OUTPAK WASHOUT AS SHOWN WHERE THE CONCRETE CAN SET, BE BROKEN UP, AND THEN DISPOSED OF PROPERLY.

